
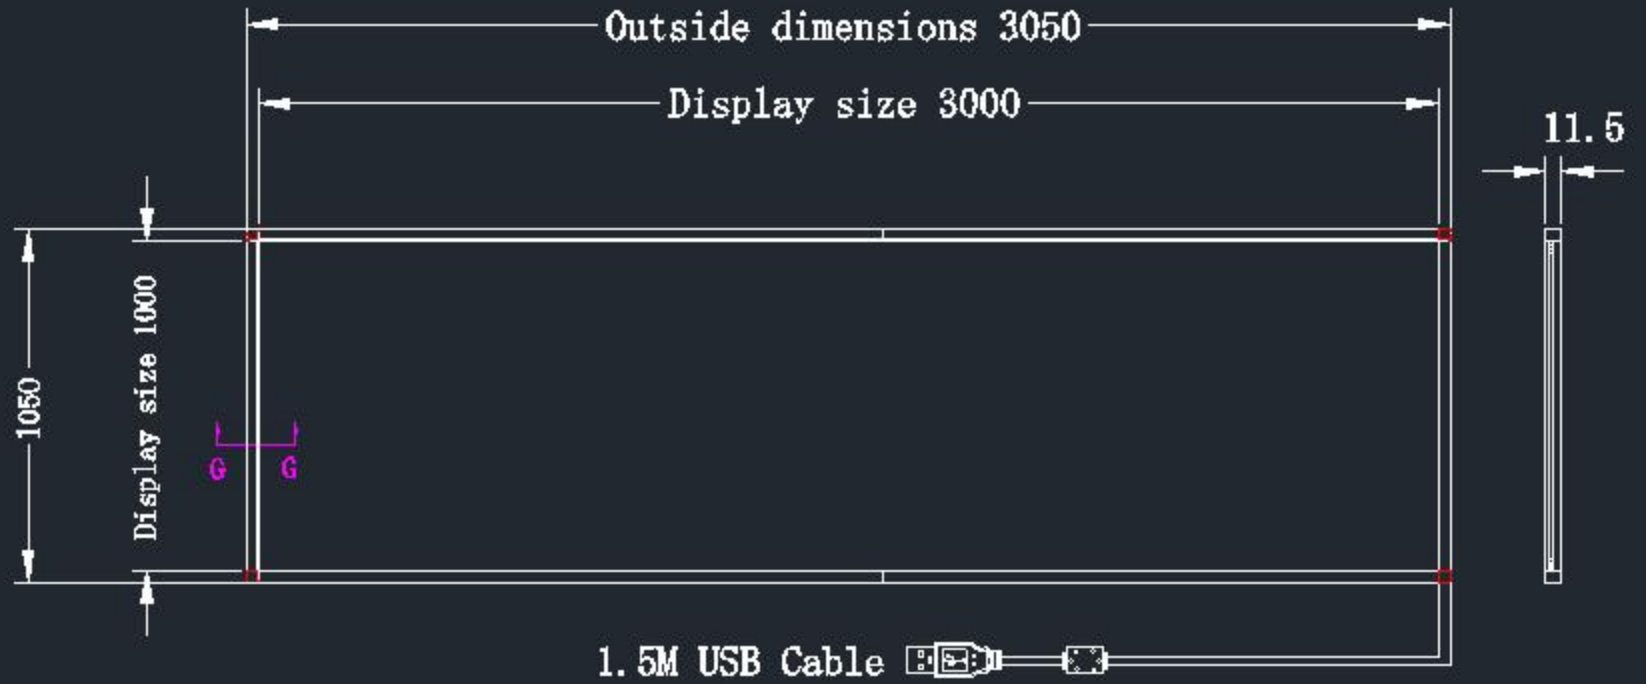



Remarks:
1. The thickness of the touch box is 11.5mm;
(Suggested) The thickness of the glass is 8mm
2. The thickness of double-sided tape is 1MM;
3. Toughened glass assembly should pay attention to the surrounding Safety and surface clean and smooth;
4.USB cable over 5 meters needs to add signal amplification Device and power supply.

截面G




TOLERANCES
(UNLESS OTHERWISE STATED)
DECIMALS ANGLES±0.5°

| | |
|---|---|
| >2000mm | ±2.00mm |
| 1600<X≤2000mm | ±1.20mm |
| 1200<X≤1600mm | ±0.80mm |
| 800<X≤1200mm | ±0.50mm |
| 400<X≤800mm | ±0.30mm |
| 120<X≤400mm | ±0.20mm |
| 30<X≤120mm | ±0.20mm |
| ≤30mm | ±0.16mm |

产品型号:DT-AA 3000X1000

| | | | |
|---|---|---|---|
| 客 户: | | 尺 寸: | |
| 日 期: | 2021.11.22 | 比 例: | 1:1 |
| 单 位: | MM | 版 次: | A0 |
| THIRD ANGLE PROJECTION | | 制 图: | CXW |
| | | 客户确认: | |